

# Schneider Electric

## PM3200 Technical Datasheet



# Power Meter Series PM3200


## Functions and characteristics



Power Meter Series PM3200



Power Meter Series PM3255

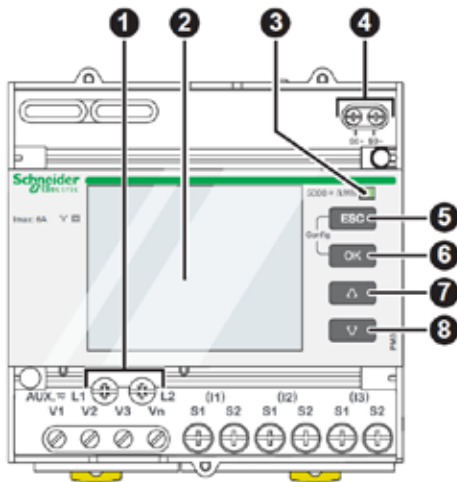

**Front of meter parts**

- 1 Control power
- 2 Display with white backlit
- 3 Flashing yellow meter indicator (to check accuracy)
- 4 Pulse output for remote transfer (PM3210)
- 5 **ESC** Cancellation
- 6 **OK** Confirmation
- 7 **▲** Up
- 8 **▼** Down

This PowerLogic Power meter offers basic to advanced measurement capabilities. With compact size and DIN rail mounting, the PM3200 allows mains and feeders monitoring in small electrical cabinets. Combined with current transformers and voltage transformers, these meters can monitor 2-, 3- and 4-wire systems. The graphic display has intuitive navigation to easily access important parameters.

Four versions are available offering basic to advanced applications:

- PM3200.
  - Electrical parameters I, In, U, V, PQS, E, PF, Hz.
  - Power/current demand.
  - Min/max.
- PM3210 .
  - Electrical parameters I, In, U, V, PQS, E, PF, Hz, THD.
  - Power/current demand, peak demand.
  - Min/max.
  - 5 timestamped alarms.
  - kWh pulse output.
- PM3250
  - Electrical parameters I, In, U, V, PQS, E, PF, Hz, THD
  - Power/current demand, peak demand
  - Min/max.
  - 5 timestamped alarms
  - LED to indicate communications
  - RS-485 port for Modbus communication
- PM3255.
  - Electrical parameters I, In, U, V, PQS, E, PF, Hz, THD.
  - Power/current demand and peak demand.
  - Flexible power and energy data logging.
  - Min/max. and 15 timestamped alarms.
  - LED to indicate communications.
  - Up to 4 tariffs management.
  - 2 digital inputs, 2 digital outputs.
  - Memory for load profile (demand 10mn to 60mn).
  - Memory for Energy (kWh, kVARh, kVAh) logging at 10, 15, 20, 30 or 60 minutes.
  - RS-485 port for Modbus communication.

- Innovative design makes the meters smart and simple.
- Easy to install for panel builders.
- Easy to commission for contractors and installers.
- Easy to operate for end users.

**Applications**

**Cost management applications**

- Bill checking
- Sub-billing, including WAGES view
- Cost allocation, including WAGES view

**Network management applications**

- Panel instrumentation
- Up to 15 onboard timestamped alarms to monitor events
- Easy integration with PLC system by input/output interface

**Market segments**

- Buildings
- Industry
- Data centres and networks
- Infrastructure (airports, road tunnels, telecom)

**Commercial Reference numbers**

Meter model and description	Performance	Comm. ref. no.
PM3200 basic power meter	Basic power meter	<b>METSEPM3200</b>
PM3210 power meter with pulse output	Power, current, THD, peak demand	<b>METSEPM3210</b>
PM3250 power meter with RS-485 port	Power, current, THD, peak demand	<b>METSEPM3250</b>
PM3255 power meter plus 2 digital inputs, 2 digital outputs with RS485 port	Power, current, THD, peak demand, memory for load profile	<b>METSEPM3255</b>

Function guide	PM3200 Range			
	PM3200	PM3210	PM3250	PM3255
<b>Performance standard</b>				
IEC61557-12 PMD/Sx/K55/0.5	■	■	■	■
<b>General</b>				
Use on LV and HV systems	■	■	■	■
Number of samples per cycle	32	32	32	32
CT input 1 A/5 A	■	■	■	■
VT input	■	■	■	■
Multi-tariff	4	4	4	4
Multi-lingual backlit display	■	■	■	■
<b>Instantaneous rms values</b>				
Current, voltage	Per phase and average	■	■	■
Active, reactive, apparent power	Total and per phase	■	■	■
Power factor	Total and per phase	■	■	■
<b>Energy values</b>				
Active, reactive and apparent energy; import and export	■	■	■	■
<b>Demand value</b>				
Current, power (active, reactive, apparent) demand; present	■	■	■	■
Current, power (active, reactive, apparent) demand; peak		■	■	■
<b>Power quality measurements</b>				
THD Current and voltage		■	■	■
<b>Data recording</b>				
Min/max of the instantaneous values	■	■	■	■
Power demand logs				■
Energy consumption log (day, week, month)				■
Alarms with time stamping		5	5	15
Digital inputs/digital outputs		0/1		2/2
<b>Communication</b>				
RS-485 port			■	■
Modbus protocol			■	■

PB108434



Power Meter Series PM3210

### Connectivity advantages

Programmable digital input	External tariff control signal (4 tariffs). Remote Reset partial counter. External status like breaker status. Collect WAGES pulses.
Programmable digital output	Alarm (PM3255) kWh pulses
Graphic LCD display	Backlit graphic display allows smart navigation in relevant information and in multi languages
Communication	Modbus RS-485 with screw terminals allows connection to a daisy chain

# Power Meter Series PM3200

## Functions and characteristics (cont.)

Specifications	PM3200 Range
<b>Type of measurement</b>	True rms up to the 15th harmonic on three-phase (3P,3P+N) and single-phase AC systems. 32 samples per cycle
<b>Measurement accuracy</b>	
Current with x/5 A CTs	0.3 % from 0.5 A to 6 A
Current with x/1 A CTs	0.5 % from 0.1 A to 1.2 A
Voltage	0.3 % from 50 V to 330 V (Ph-N), from 80 V to 570 V (Ph-Ph)
Power factor	±0.005 from 0.5 A to 6 A with x/5 A CTs; from 0.1 A to 1.2 A with x/1 A CTs and from 0.5 L to 0.8 C
Active/Apparent Power with x/5 A CTs	Class 0.5
Active/Apparent Power with x/1 A CTs	Class 1
Reactive power	Class 2
Frequency	0.05 % from 45 to 65 Hz
Active energy with x/5 A CTs	IEC 62053-22 Class 0.5S
Active energy with x/1 A CTs	IEC 62053-21 Class 1
Reactive energy	IEC 62053-23 Class 2
<b>Data update rate</b>	
Update rate	1s
<b>Input-voltage characteristics</b>	
Measured voltage	50 V to 330 V AC (direct / VT secondary Ph-N) 80 V to 570 V AC (direct / VT secondary Ph-Ph) up to 1 M V AC (with external VT)
Frequency range	45 Hz to 65 Hz
<b>Input-current characteristics</b>	
CT primary	Adjustable from 1 A to 32767 A
CT secondary	1 A or 5 A
Measurement input range with x/5A CTs	0.05 A to 6 A
Measurement input range with x/1A CTs	0.02 A to 1.2 A
Permissible overload	10 A continuous, 20 A for 10s/hour
<b>Control Power</b>	
AC	100/173 to 277/480 V AC (+/-20 %), 3W/5 VA; 45 Hz to 65 Hz
DC	100 to 300 V DC, 3 W
<b>Input</b>	
Digital inputs (PM3255)	11 to 40 V DC, 24 V DC nominal, ≤4 mA maximum burden, 3.5 kVrms insulation
<b>Output</b>	
Digital output (PM3210)	Optocoupler, polarity sensitive, 5 to 30 V, 15 mA max, 3.5 kVrms insulation
Digital outputs (PM3255)	Solid state relay, polarity insensitive, 5 to 40 V, 50 mA max, 50 Ω max, 3.5 kVrms insulation

# Power Meter Series PM3200

## Functions and characteristics (cont.)

Specifications (continued)	PM3200 Range
<b>Mechanical characteristics</b>	
Weight	0.26 kg
IP degree of protection (IEC60529)	IP40 front panel, IP20 meter body
Dimension	90 x 95 x 70 mm
<b>Environmental conditions</b>	
Operating temperature	-25 °C to 55 °C
Storage temperature	-40 °C to 85 °C
Humidity rating	5 to 95 % RH at 50 °C (non-condensing)
Pollution degree	2
Metering category	III, for distribution systems up to 277/480 V AC
Dielectric withstand	As per IEC61010-1, Doubled insulated front panel display
Altitude	3000m (984 ft) max
<b>Electromagnetic compatibility</b>	
Electrostatic discharge	Level IV (IEC61000-4-2)
Immunity to radiated fields	Level III (IEC61000-4-3)
Immunity to fast transients	Level IV (IEC61000-4-4)
Immunity to surge	Level IV (IEC61000-4-5)
Conducted immunity	Level III (IEC61000-4-6)
Immunity to power frequency magnetic fields	0.5mT (IEC61000-4-8)
Conducted and radiated emissions	Class B (EN55022)
<b>Safety</b>	
	CE as per IEC61010-1 ★
<b>Communication</b>	
RS-485 port	Half duplex, from 9600 up to 38400 bauds, Modbus RTU (double insulation)
<b>Display characteristics</b>	
Dimensions (VA)	43 x 34.6 mm
Display resolution	128 x 96 dots
<b>Standard compliance</b>	
	IEC 61557-12, EN 61557-12 IEC 61010-1, UL 61010-1 IEC 62052-11, IEC 62053-21, IEC 62053-22, IEC 62053-23 EN 50470-1, EN 50470-3

★ Protected throughout by double insulation



Power Meter Series PM3250

### Multi-tariff capability

The PM3200 range allows arrangement of kWh consumption in four different registers. This can be controlled by:

- Digital Inputs. Signal can be provided by PLC or utilities.
- Internal clock programmable by HMI.
- Through communication.


This function allows users to:

- Make tenant metering for dual source applications to differentiate backup source or utility source.
- Understand well the consumption during working time and non working time, and between working days and weekends.
- Follow up feeders consumption in line with utility tariff rates.


# Power Meter Series PM3200

## Dimensions and connection


### PM3200 series dimensions

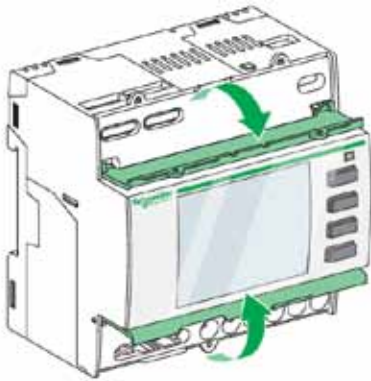

PM3200 top and lower flaps

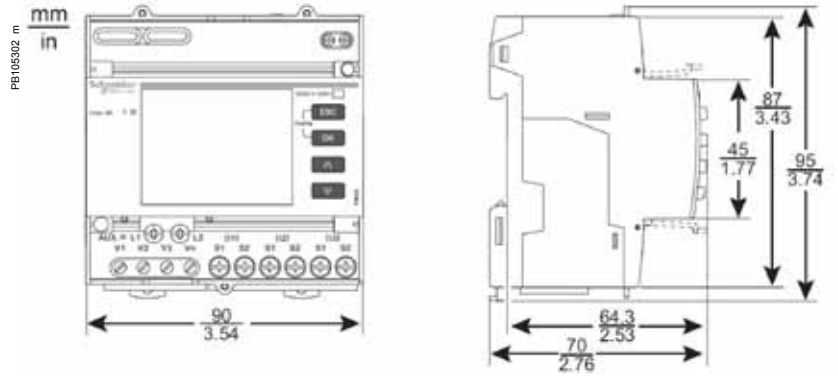

### PM3200 series easy installation

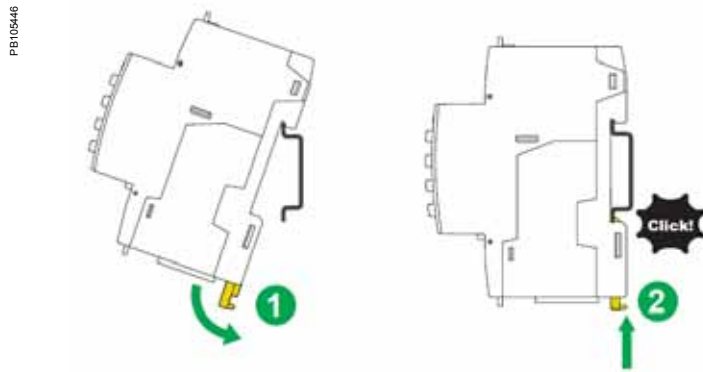

See appropriate product Install Guide for further information.

Schneider Electric Industries SAS  
35, Rue Joseph Monier,  
CS 30323  
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439  
Capital social 896 313 776  
[www.schneider-electric.com](http://www.schneider-electric.com)

**Product name**  
**PLSED310043EN**

As standards, specifications and designs develop from time to time, please ask for confirmation of the information given in this document.

Design: Schneider Electric  
Photos: Schneider Electric

Over 75 % of Schneider Electric products  
have been awarded the Green Premium ecolabel



© 2016 - Schneider Electric - All rights reserved

05-2016

Life Is On

**Schneider**  
Electric